



Sto TurboStick®

A revolutionary foam adhesive that delivers unmatched convenience and efficiency.

Sto TurboStick® is a ready-to-use, single component polyurethane foam adhesive for installing Sto insulation boards in StoTherm exterior wall claddings, including StoTherm ci XPS. It is also used to attach continuous insulation in StoEnergy Guard® applications. Compared to cementitious adhesives, Sto TurboStick delivers unparalleled convenience and speed.

Features:	Benefit:
Ready-to-apply	Go straight to the wall as there is no mixing (translation: no labor) required compared to traditional cementitious adhesives.
Cures in one hour	Rasp, cut joints and apply basecoat and mesh the same day instead of waiting until the following day.
Small packaging	Easier to handle the material on scaffolding. Requires less space on the ground for staging compared to bag material.
Lightweight	The product weighs significantly less than a bag of basecoat. In addition its compact size makes it easier to carry and handle, for example on scaffolding.

Sto TurboStick

Polyurethane-Foam Adhesives – Revolutionizing the Way We Work

Traditional cementitious adhesives require mixing and extended drying time. The leader in innovation, Sto offers an entirely new PU-foam adhesive system that outperforms traditional adhesives across the board. Sto TurboStick requires no mixing, goes on easier, cures in just one hour, and can even be used for other applications, such as filling voids between insulation boards. It is also lightweight so it requires no heavy lifting to get it up the scaffolding like cementitious adhesives.

Sto TurboStick Saves Time & Money


It's only logical that a product that saves time at every turn also saves money, right? Absolutely. By cutting the cure time from a full day to just one hour, taking less time to stage materials and with a ready-to-use product, you can finish projects faster and move on to the next project.

Available in Two Convenient Sizes

Sto TurboStick is available in both a cylinder and a mini applicator so you can choose the size that best fits your needs.

The Ultra-Lightweight, Ultra-Maneuverable Sto TurboStick Mini

Compact and easy to use, the Sto TurboStick Mini offers the fastest application of any PU-foam adhesive with ultra-fast cure time! Maximize the speed of application with the new Sto TurboStick Mini.

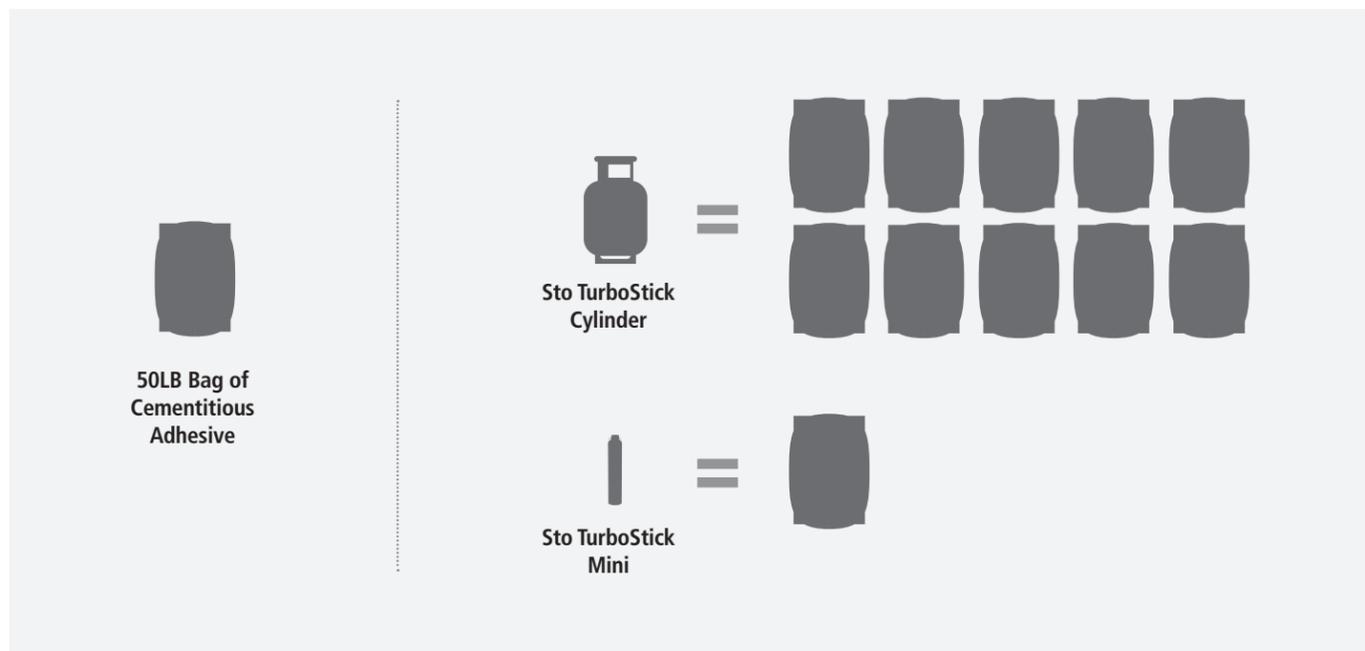

	Sto Turbostick Cylinder	Sto Turbostick Mini
Packaging	31 lbs. (14.1 kg) Cylinder	25.4 oz (750 mL) Canister
Coverage (Per Unit)	850-1,000 ft ² (79-93 m ²)	110-130 ft ² (10-12 m ²)
Cure Time	Full curing occurs in 1 hour under normal conditions [70°F (21°C), 50% RH]	
Application Temperature	Minimum ambient and surface temperature for use is 41°F (5°C) and rising. Maximum application temperature is 95°F (35°C)	
Accessories	Pistol & Hose (sold separately)	Pistol (sold separately)

Sto Corp.

3800 Camp Creek Parkway
Building 1400, Suite 120
Atlanta, GA 30331
Phone 404-346-3666
Toll Free 1-800-221-2397
Fax 404-346-3119
www.stocorp.com

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.